

d é c o u v r e z
l a
d i f f é r e n c e

d i s c o v e r
t h e
d i f f e r e n c e

ALUMILEX
Systèmes architecturaux. Portes et fenêtres aluminium-bois
Architectural Systems. Aluminum-Wood Doors and Windows



ALXBOIS/WOOD *Portes et fenêtres aluminium / bois*
Aluminum / Wood Doors and Windows

ALXWOOD SYSTEM

Technical Information

- Aluminum Extrusion: 6063-T5 alloy, anodizing quality.
- Thermal Breaks: Crimped continuous polyamide bars reinforced with fiberglass.
- Pressure Stabilizer: EPDM pressure gaskets.
- Weatherstripping: EPDM central and rebate compression gasket.
- Frame Depth: 63 mm
- Sash Depth: 85 mm
- Glazing Thicknesses: From 23 mm to 30 mm
- Finishes: Anodic treatment, RAL Powder coating, Duranar and others for exterior finish; and a choice of solid wood species for interior finish.
- Air Leakage: A3 (ASTM E 283-91)
- Resistance to Wind-driven Rain: B7 (ASTM E 547-86)
- Wind Resistance: C5 (ASTM E 330-90)
- Warping: Succeeded
- Ease of operation: F1
- Condensation resistance: I64

Description

- Alumilex's ALXWOOD system allows for the construction of windows and window-doors with a variety of opening configurations: Fixed, Tilt and turn, Swinging, Hopper, Tilt and slide, French opening, folding as well as Entrance doors.
- In order to support you in your design process, Alumilex's ALXWOOD system is available with additional profiles for combining different modes of operation: Clerestory, Bay or Bow windows, Sidelites, Transoms, Opening Transoms and many others.



- Low-emissivity glass
- Insulating argon inner space
- Non-conductive edge spacers



configurations


- Tilt & Turn Windows
- Hopper Windows
- Tilt & Slide Doors
- Folding Doors
- Entrance Doors



Standard Finishes



ALX BOIS - Fenêtre fixe, oscillo-battante ou à soufflet
ALX WOOD - Fixed, Tilt & Turn or Hopper Window

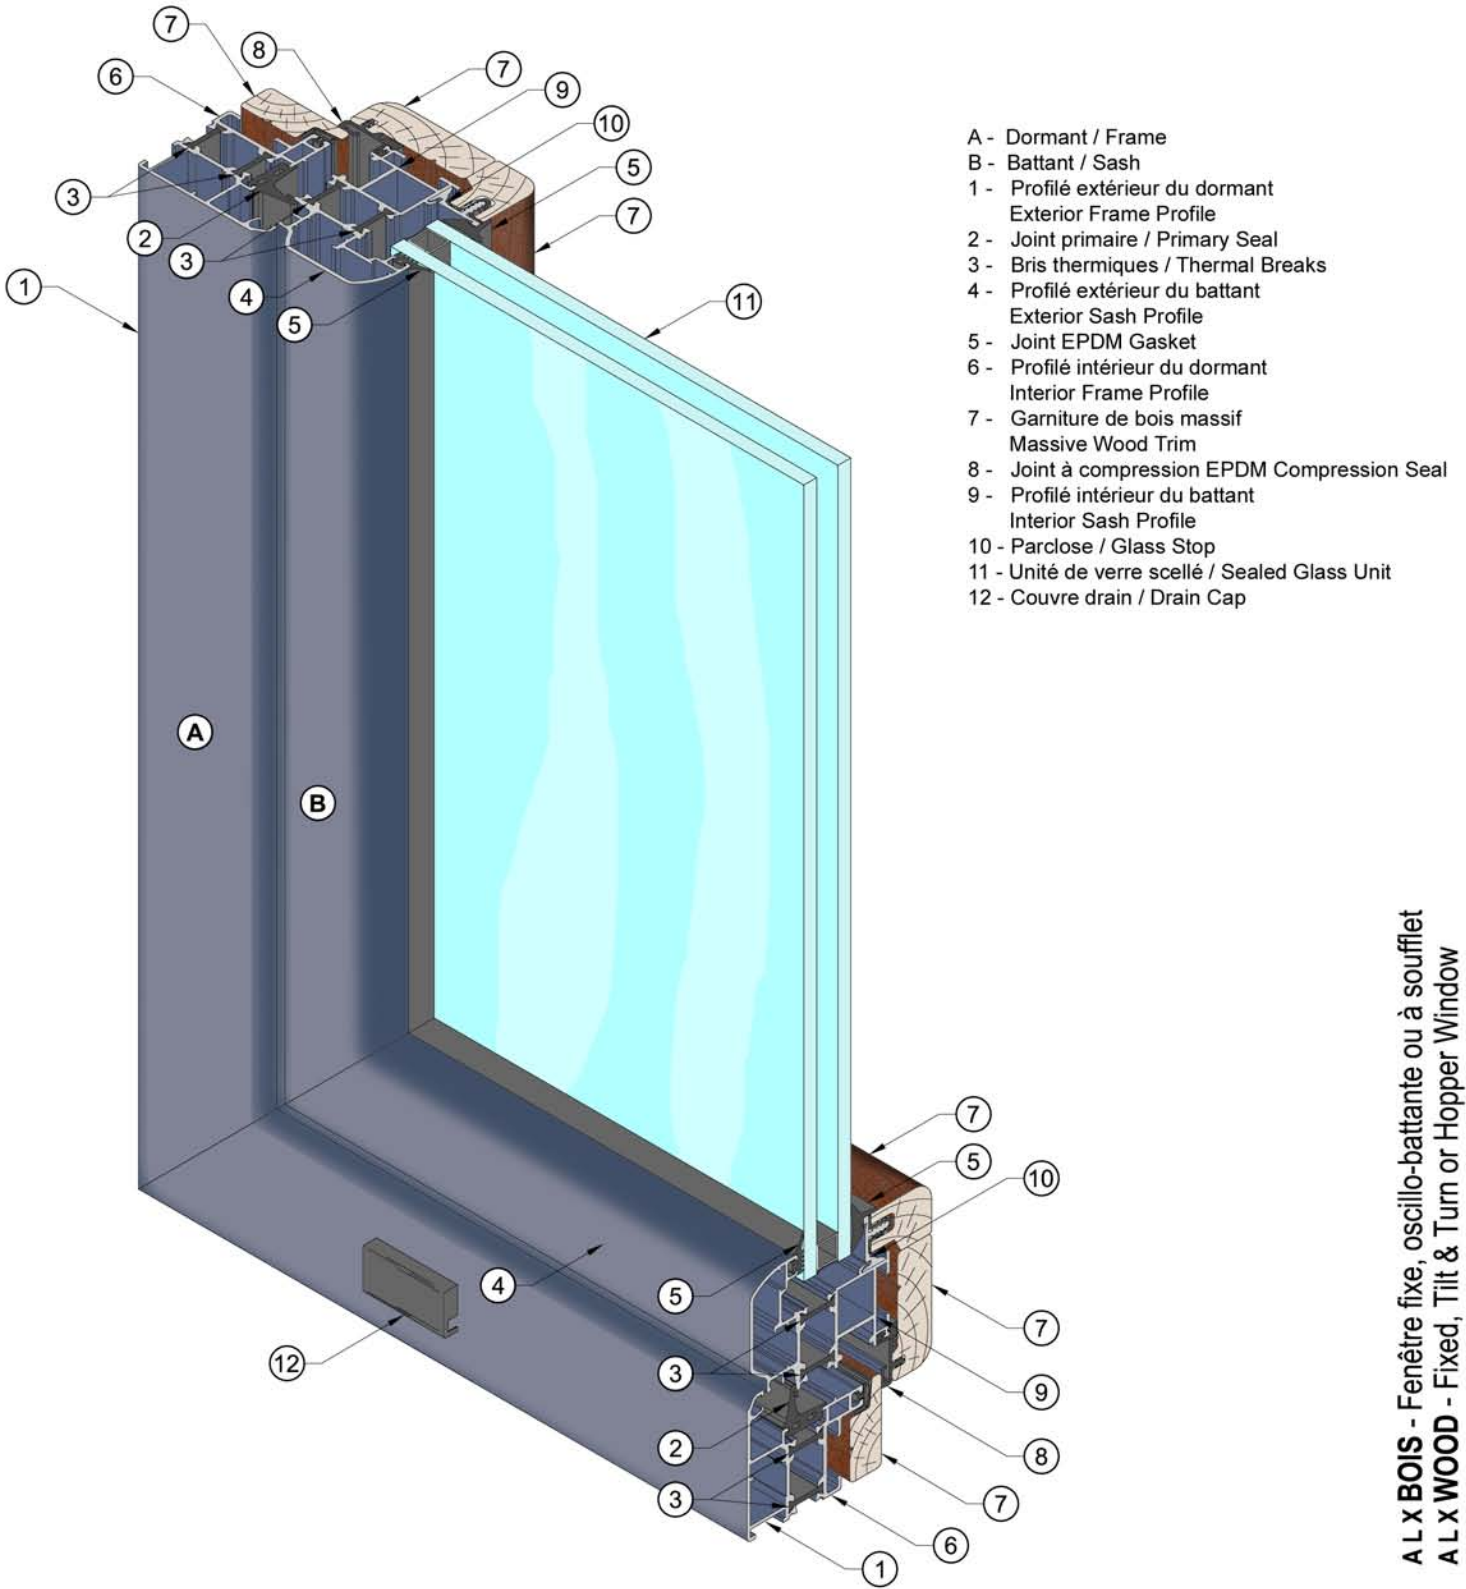

ALX BOIS - Fenêtre fixe, oscillo-battante ou à soufflet
 ALX WOOD - Fixed, Tilt & Turn or Hopper Window