

ALX2066


/ Fixed Aluminum window
Window Wall

- ✓ 30mm Polyamide thermal break strips and foam filled cavities for augmented performance.
- ✓ Advanced corner crimping complimented by stainless steel baffles to ensure a seamless assembly.
- ✓ Improved sealing performance through EPDM material coextruded with foam for optimized compression and flexibility.
- ✓ Glazing solutions for units ranging from 6 mm to 48 mm in thickness.
- ✓ Frame depth of 2-5/8", 4-1/4" or 5".
- ✓ U= 1.57 W/M2K in a double glazed configuration.
- ✓ U= 0.99 W/M2K in a triple glazed configuration.

HIGH PERFORMANCE

High Performance Series

This ultra high performance fixed aluminum window system delivers exceptional versatility, offering a wide selection of configuration options paired with significantly enhanced insulating capabilities. Built entirely in Canada, it is meticulously engineered to withstand the rigorous conditions of Canada's Nordic climate, providing outstanding durability, remarkable energy efficiency, and reliable long term performance.

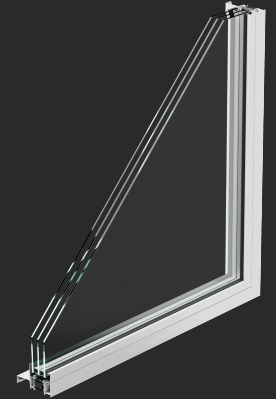

alumilex.com

A L U M I L E X

info@alumilex.com

514 955-4135