


ALX2090

/ Fixed window *Window Wall*

- ✓ 54 mm Polyamide thermal break strips and foam filled cavities for augmented performance
- ✓ Advanced corner crimping complimented by stainless steel baffles to ensure a seamless assembly
- ✓ Improved sealing performance through EPDM material coextruded with foam for optimized compression and flexibility.
- ✓ Glazing solutions for units ranging from 29 mm to 73 mm in thickness.
- ✓ Developed to achieve the highest building efficiency standards.
- ✓ Frame depth of 3-1/2", 5-1/8" or 5-7/8".
- ✓ U= xxx W/M2K in a double glazed configuration.
- ✓ U= xxx W/M2K in a triple glazed configuration
- ✓ U= xxx W/M2K in a quadruple glazed configuration

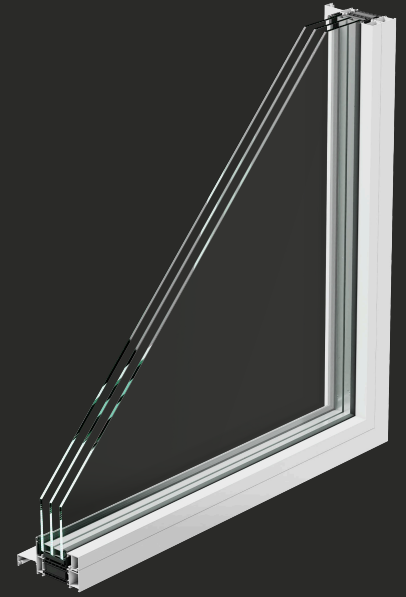

ULTRA PERFORMANCE

Ultra Performance Series

This next generation fixed aluminum window system represents a pinnacle of performance and design. It offers remarkable versatility through an extensive range of configuration possibilities, complemented by advanced insulating technologies for superior thermal efficiency. Crafted entirely in Canada, it is engineered with exceptional precision to thrive in the harshest conditions of Canada's Nordic climate, delivering unmatched durability, exceptional energy performance, and long lasting reliability.

